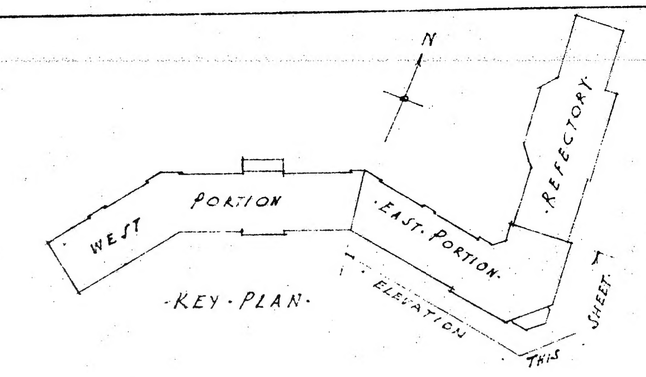



"D"
3" x 12" STONE COPING EL. 251'-1"
15" RETIRE
ROOF SLAB
PENT. ROOF
15" O.G. GUTTER
3" D.S.
METAL SASH
PENT. HOUSE FLOOR EL. 240'-4"
CI. STAIRS
ROOF SLAB EL. 236'-6"
TOP OF STONE COPING EL. 234'-1"
13'-11" RISE
3RD FL. LINE EL. 225'-4"
2ND FL. LINE EL. 214'-2"
1ST FL. LINE EL. 203'-0"
GROUND FL. LINE EL. 190'-0"
TUNNEL FL. LINE EL. 180'-0"
CONTINUOUS L
METAL SASH
SPRUCE SPRINGFIELD
TOP OF CONCRETE EL. 202'-10"
PRES. GRADE
NEW GRADE
NEW AND PRES. GRADES SAME
SEE DETAIL ON SHEET NO. 119
CONCRETE
3"x6" METAL D.S.
CI. SHOE
NEW GRADE
NEW AND PRES. GRADES
EL. 180'-6"
ELEV. BOT. FOOTINGS EL. 180'-6"
ELEVATION OF BOTTOM OF ALL THESE FOOTINGS TO BE 180'-6"
REFECTORY PORTION
ANCHOR STONE TO MATCH D.W. SHEET NO. 127
METAL WINDOWS
CONC. SILL EL. 182'-0"
EL. 178'-0"
23 180 179 178 177 176 175 174 173 172 171 170 169 168 167 166 165 164 163 162 161 160 159

NOTES.
ALL OPENINGS, DETAILS, ETC. NOT DRAWN IN FULL SHALL REPEAT AS PER THOSE OF CORRESPONDING SIZE AND DESIGN.
GLASS SIZES GIVEN ARE APPROXIMATE AND FOR ESTIMATING PURPOSES ONLY. FRAMES SHALL BE MADE TO SUIT SIZES OF MASONRY OPENINGS.

DEVELOPED SOUTH ELEVATION - EAST PORTION - MAIN HOSPITAL BUILDING.
SCALE 1/8" = 1'0".

KEY TO MATERIALS.
BRICK. STONE.
SHEET METAL.

HOSPITAL
WAVERLY HILL SANITARIUM
VALLEY STATION JEFFERSON COUNTY KY.

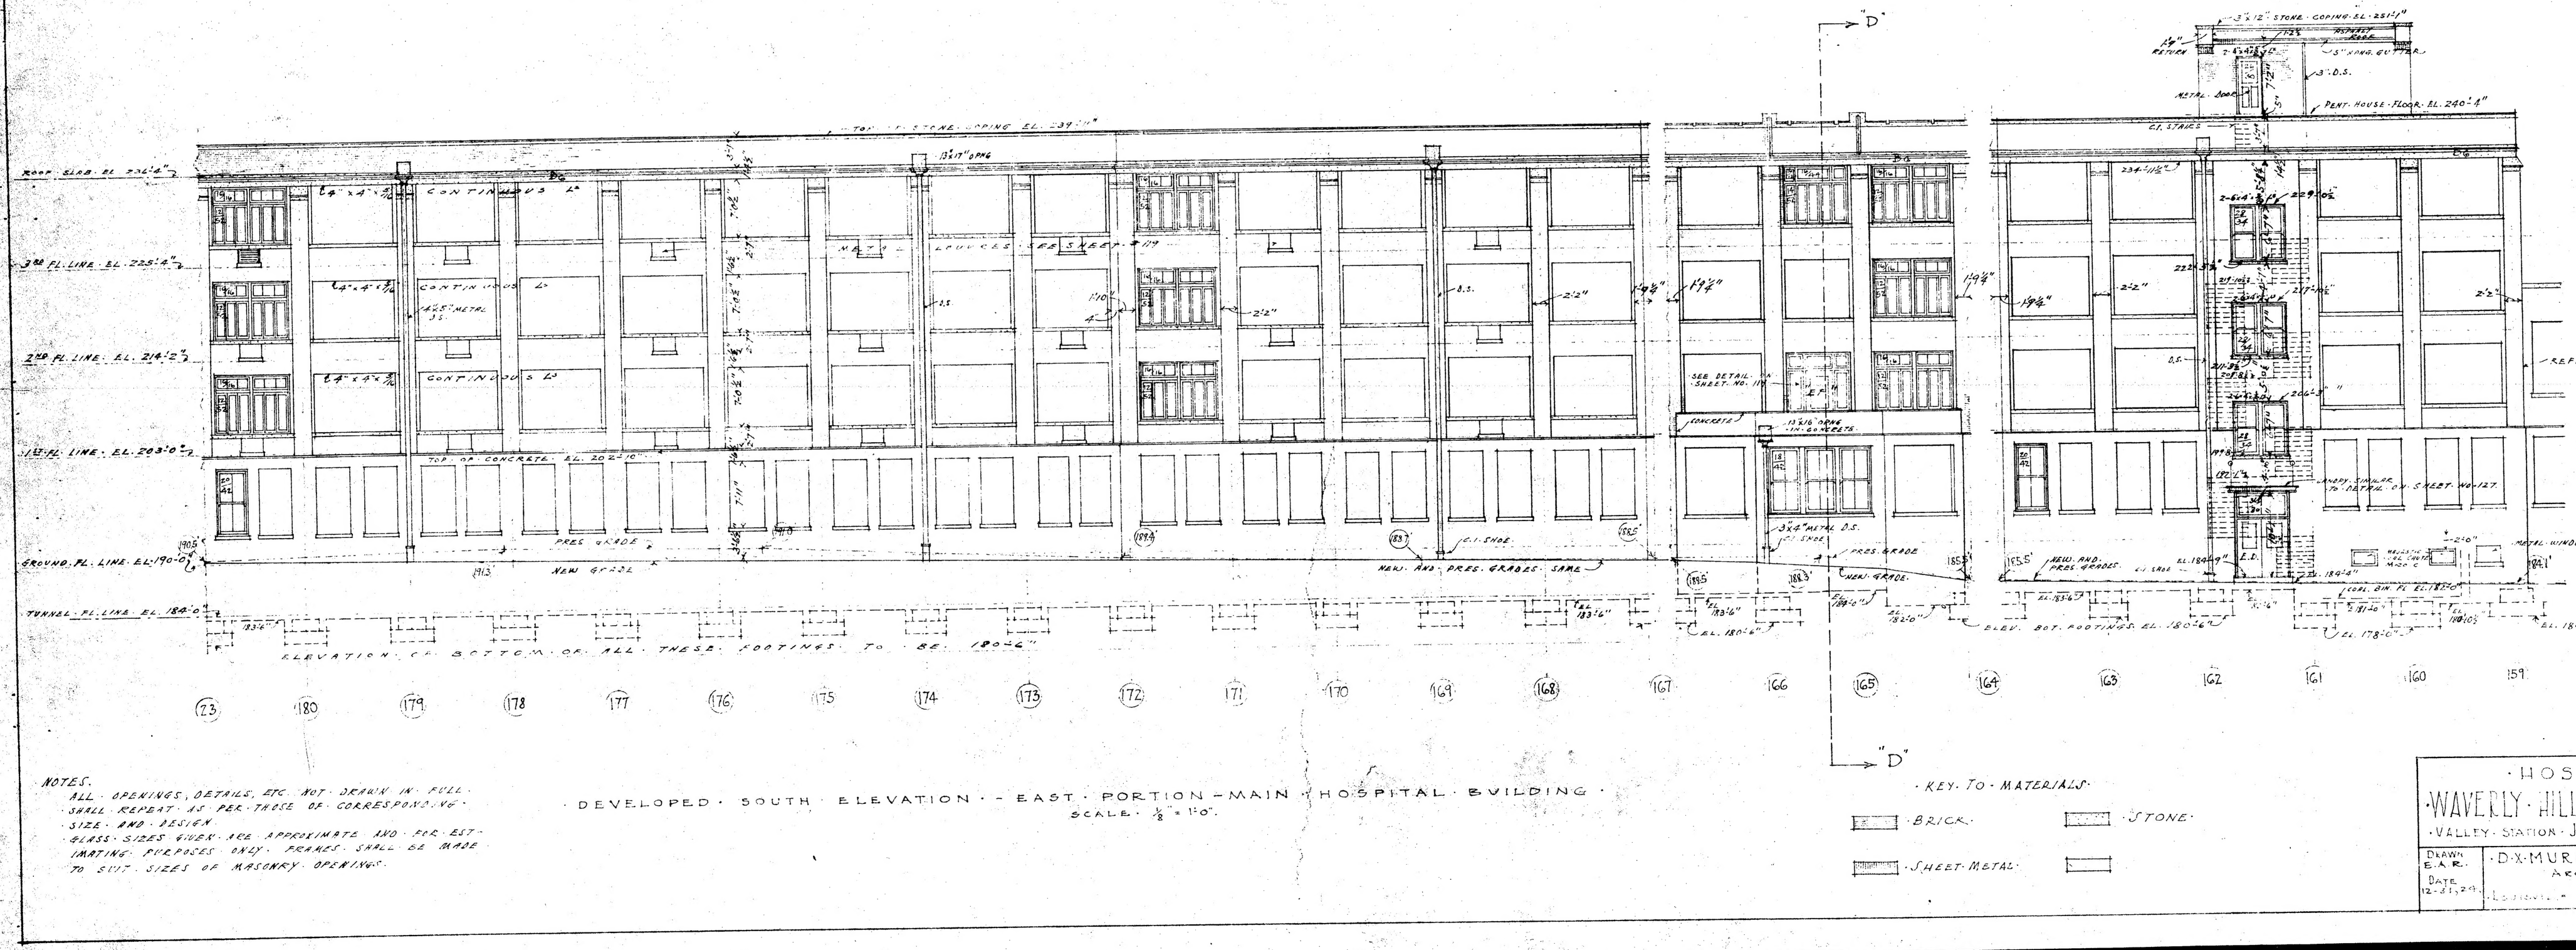DRAWN E.A.R.
DATE 12-31-29
D.X. MURPHY & BRO. ARCHITECTS
LOUISVILLE KENTUCKY.
SHEET NO. 111